M1054

Network Camera

Key Features:

- Easy and flexible installation
- PIR sensor and illumination LED
- Microphone, speaker and I/O ports
- Micro SD/MicroSDHC card slot

OVERVIEW

AXIS M10 Series offers small and smart cameras, ideal for securing locations such as small businesses, boutiques, restaurants, hotels or residences. These intuitive and dependable cameras offer best-in-class image quality and professional monitoring capabilities.

AXIS M10 Network Cameras with their functional and smart design offer a high quality yet affordable video surveillance solution. Using progressive scan technology, the AXIS M1054 camera provide VGA or HDTV images of moving objects with minimum motion blur.

AXIS M1054 is designed for easy and flexible installation. AXIS M1054 can be powered either over Ethernet or by power supply.

AXIS M1054 feature an integrated PIR sensor for detecting movement even in the dark, and a white LED for illuminating the scene at an event. AXIS M1054 additionally supports one input and one output port for connecting external devices.

AXIS M1054 provide two-way audio support with built-in microphone and speaker, allowing remote listening in on an area, as well as communication with individuals directly or using uploaded or recorded audio clips.

(continued)

(continued)

SPECIFICATIONS

Features	Power over Ethernet, PIR sensor, illumination LED, audio, I/O ports
Image sensor	1/4" progressive scan RGB CMOS
Lens	2.9 mm: 84° view (horizontal angle of view), F2.0, fixed iris &focus
Light sensitivity	1.2 - 10000 lux, F2.0
Shutter time	1/24500 s to 1/6 s
Pan/Tilt/Zoom	Digital PTZ, preset positions, guard tour
Video compression	H.264 Baseline (MPEG-4 Part 10/AVC), Motion JPEG
Resolutions	1280x800 to 160x90
Frame rate	H.264: 30 fps in all resolutions. Motion JPEG: 30 fps in all resolutions (performance may be reduced in wireless mode)
Video streaming	Multiple, individually configurable streams in H.264 and motion JPEG. Controllable frame rate and bandwidth VBR/CBR H.264, MPEG-4 Part 2
Image settings	Mirroring, Axis' Corridor Format
Audio streaming	Two-way
Audio compression	AAC-LC 8/16 kHz, G.711 PCM 8 kHz, G.726 ADPCM 8 kHz Configurable bit rate
Audio in/out	Built-in microphone (can be disabled) and speaker
Wireless interface	Internal antenna
Security	Password protection, IP address filtering, HTTPS** encryption, IEEE 802.1X network access control, digest authentication, user access log
Supported protocols	IPv4/v6, HTTP, HTTPS**, QoS Layer 3 DiffServ, FTP, CIFS/SMB, SMTP, Bonjour, UPnP™, SNMPv1/v2c/v3(MIB-II), DNS, DynDNS, NTP, RTSP, RTP, TCP, UDP, IGMP, RTCP, ICMP, DHCP, ARP, SOCKS
Event triggers	External input, built-in PIR
Event actions	External output activation
Data Streaming	Event data
Built-in installation aids	Pixel counter
Memory	128 MB RAM, 128 MB Flash
Power	Power over Ethernet IEEE 802.3af Class 2 (max. 6.49 W)
Connectors	1 alarm input and 1 output
Edge storage	Support for recording to network share (Network Attached Storage or file server)
PIR sensor	Passive infrared (PIR) motion sensor with configurable sensitivity. Max range: 6 m

(continued)

Illumination LED	White illumination LED: 1 W, Class 1M
Operating conditions	0 °C to 40 °C (32 °F to 104 °F)
Humidity	20 - 80% RH (non-condensing)
Approvals	EN 55022 Class B, EN 61000-3-2, EN 61000-3-3, EN 61000-6-1, EN 61000-6-2, EN 55024, FCC Part 15 Subpart B and C Class B, VCCI Class B, C-tick AS/NZS CISPR 22, ICES-003 Class B, KCC Class B, EN 60950-1 Power supply: EN 60950-1, cCSAus
Weight	156 g (0.34 lb)

**This product includes software developed by the OpenSSL. Project for use in the OpenSSL Toolkit. (www.openssl.org)

DIMENSIONS

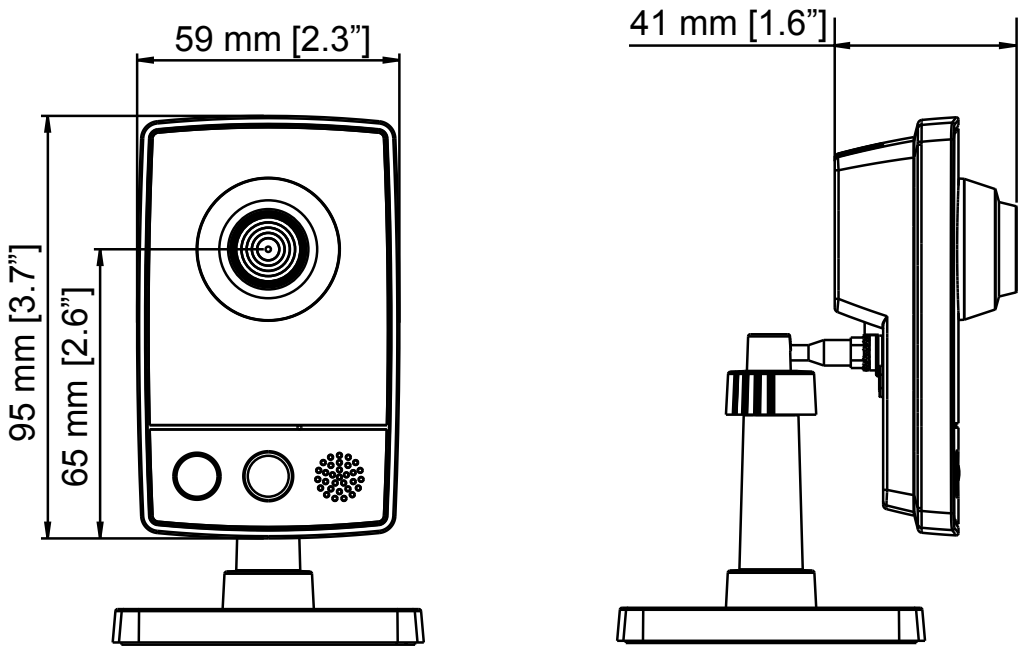

All specifications are subject to change without notice. Copyright © MegaPixel IP. All rights reserved